

Basic Parameters

Model	-	1.GWH18AUDXE-K6DNA1A 2.GWH18AUDXE-K6DNA2A
Product Code	-	1.CB575000900/CB575000905/CB575000906 2.CB597000702/CB597000700
Power Supply	Rated Voltage	V~ 220-240
	Rated Frequency	Hz 50
	Phases	- 1
Power Supply Mode	-	Outdoor
Cooling Capacity	W	5300
Heating Capacity	W	5600
Cooling Power Input	W	1472
Heating Power Input	W	1365
Cooling Current Input	A	6.6
Heating Current Input	A	6.2
Rated Input	W	2300
Rated Cooling Current	A	11.5
Rated Heating Current	A	11.5
Air Flow Volume	m ³ /h	1000/880/760/650/620/600/550
Dehumidifying Volume	L/h	1.8
EER	W/W	3.6
COP	W/W	4.1
SEER	-	8
SCOP (Average/Warmer/Colder)	-	4.6/5.8/3.6
Application Area	m ²	23-34

Indoor Unit Parameters

Indoor Unit Model	-	1.GWH18AUDXE-K6DNA1A/I 2.GWH18AUDXE-K6DNA2A/I
Indoor Unit Product Code	-	1.CB575N00900/CB575N00905/CB575N00906 2.CB597N00702/CB597N00700
Fan Type	-	Cross-flow
Fan Diameter Length (D×L)	mm	Φ106X739
Cooling Speed	r/min	1250/1150/1030/960/800/700/650/500
Heating Speed	r/min	1300/1150/1040/950/900/880/800
Fan Motor Power Output	W	45
Fan Motor RLA	A	0.25
Fan Motor Capacitor	μF	/
Evaporator Form	-	Aluminum Fin-copper Tube
Evaporator Pipe Diameter	mm	Φ5
Evaporator Row-fin Gap	mm	2-1.3
Evaporator Coil Length (L×D×W)	mm	745X22.8X342.9
Swing Motor Model	-	MP24AK/MP24BA/MP24HF
Swing Motor Power Output	W	1.5/1.5 /1.5
Fuse Current	A	3.15
Sound Pressure Level	dB (A)	Cooling:45/42/40/37/34/29/26/23 Heating:48/44/42/38/36/35/32
Sound Power Level	dB (A)	Cooling:60/57/55/52/49/44/41/38 Heating:60/56/54/50/48/47/44
Dimension (W×H×D)	mm	993X311X222
Dimension of Carton Box (L×W×H)	mm	1050X377X288
Dimension of Package (L×W×H)	mm	1055X385X298
Net Weight	kg	13
Gross Weight	kg	15.5

Outdoor Unit Parameters

Outdoor Unit Model	-	GWH18AUDXE-K6DNA1A/O(LCLH)
Outdoor Unit Product Code	-	CB575W00900
Compressor Manufacturer	-	ZHUHAI LANDA COMPRESSOR CO.,LTD.
Compressor Model	-	QXF-M130zF170
Compressor Oil	-	FW68DA or equivalent
Compressor Type	-	Rotary
Compressor LRA.	A	/
Compressor RLA	A	/
Compressor Power Input	W	1196
Compressor Overload Protector	-	/
Throttling Method	-	Electron expansion valve
Set Temperature Range	°C	16~30
Cooling Operation Ambient Temperature Range	°C	-15~50
Heating Operation Ambient Temperature Range	°C	-25~30
Condenser Form	-	Aluminum Fin-copper Tube
Condenser Pipe Diameter	mm	Φ7.94
Condenser Rows-fin Gap	mm	2-1.4
Condenser Coil Length (L×D×W)	mm	833X38.1X528
Fan Motor Speed	rpm	970
Fan Motor Power Output	W	40
Fan Motor RLA	A	0.7
Fan Motor Capacitor	μF	/
Outdoor Unit Air Flow Volume	m ³ /h	3000
Fan Type	-	Axial-flow

Fan Diameter	mm	Φ445
Defrosting Method	-	Automatic Defrosting
Climate Type	-	T1
Isolation	-	I
Moisture Protection	-	IPX4
Permissible Excessive Operating Pressure for the Discharge Side	MPa	4.3
Permissible Excessive Operating Pressure for the Suction Side	MPa	2.5
Sound Pressure Level	dB (A)	59
Sound Power Level	dB (A)	65
Dimension (W×H×D)	mm	873X555X376
Dimension of Carton Box (L×W×H)	mm	948X428X591
Dimension of Package (L×W×H)	mm	951X431X620
Net Weight	kg	37
Gross Weight	kg	40
Refrigerant	-	R32
Refrigerant Charge	kg	0.95

Connection Pipe Parameters

Connection Pipe Length	m	5
Connection Pipe Gas Additional Charge	g/m	16
Outer Diameter Liquid Pipe	inch	1/4
Outer Diameter Gas Pipe	inch	1/2
Max Distance Height	m	10
Max Distance Length	m	25



Note: The connection pipe applies metric diameter.

The above data is subject to change without notice. Please refer to the nameplate of the unit.



3.2 Capacity Variation Ratio According to Temperature

Heating operation ambient temperature range is -25°C~30°C.

Cooling ►

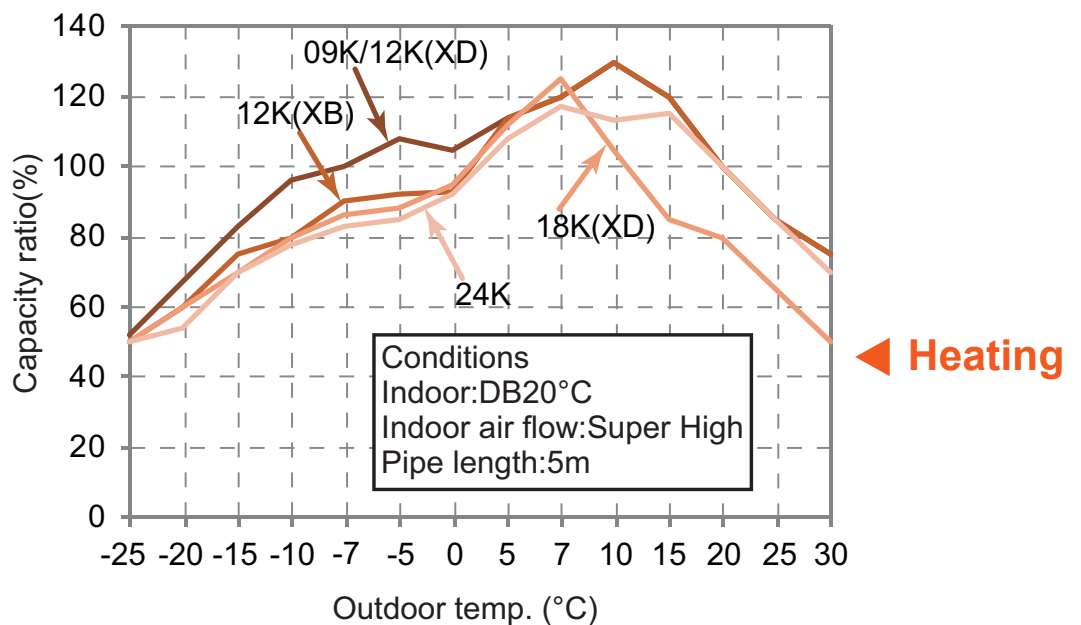
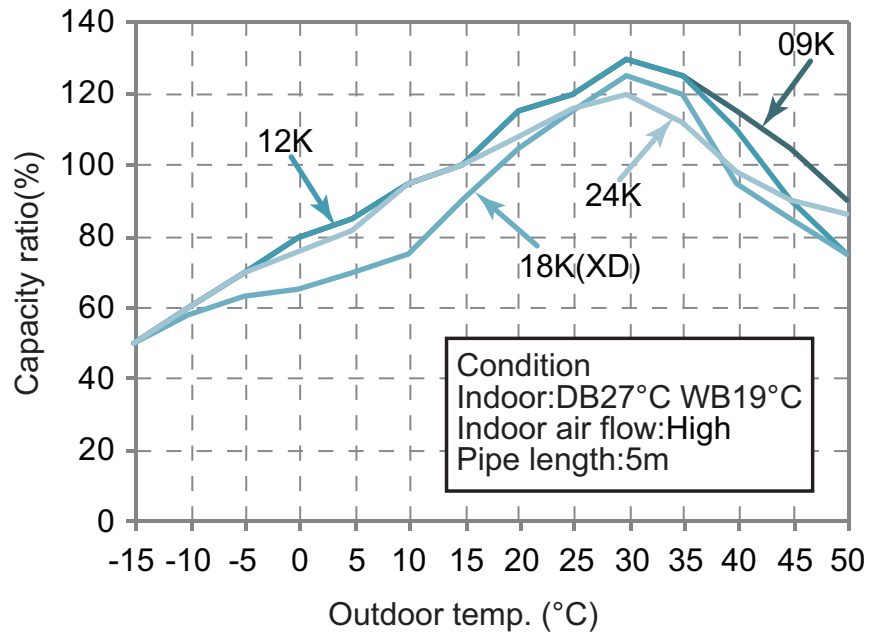


Cooling ►

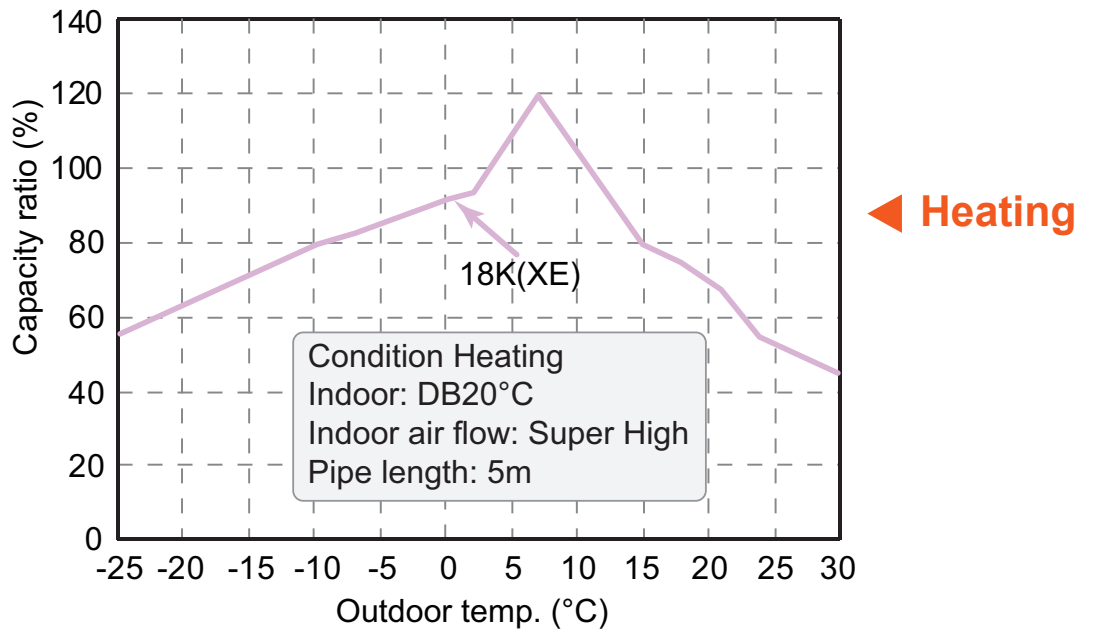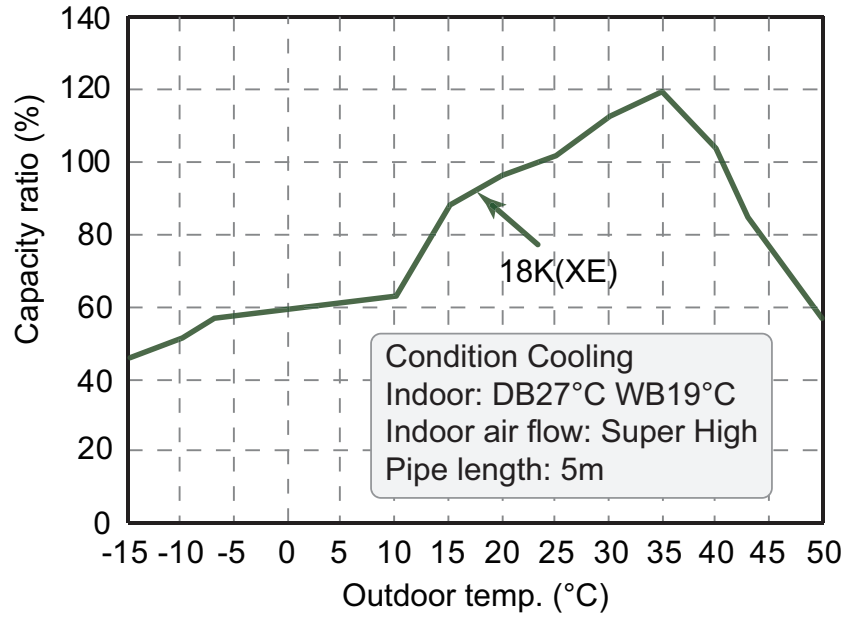



Heating operation ambient temperature range is -15°C~30°C.

Cooling ►

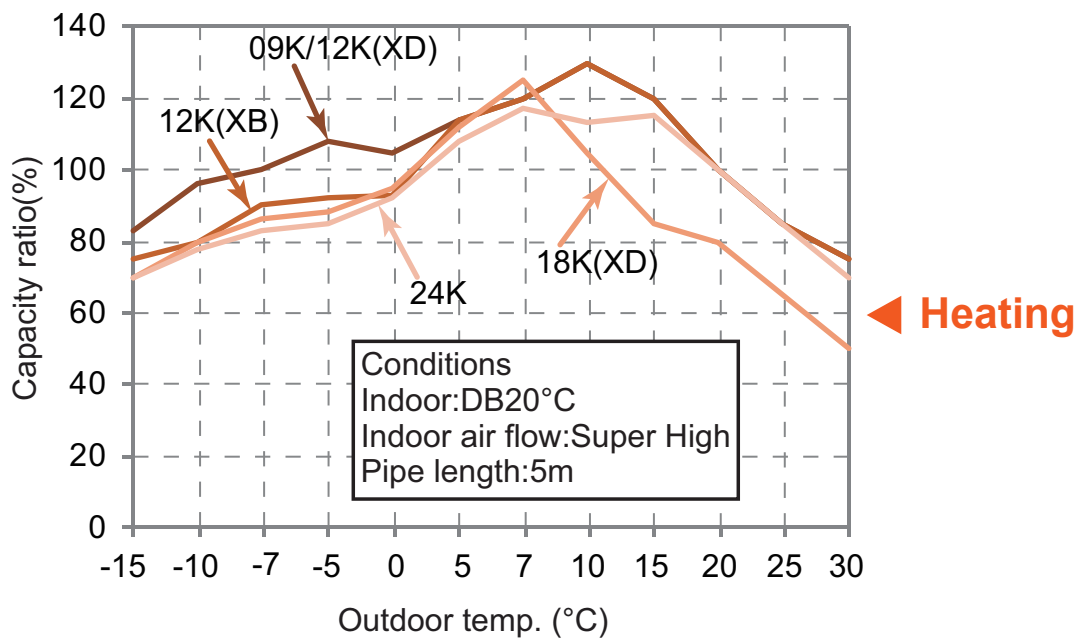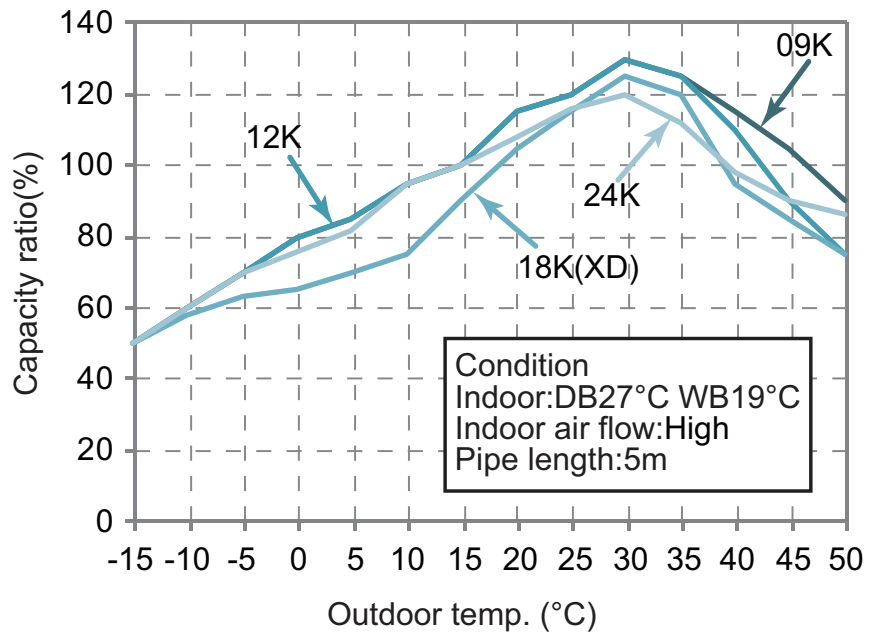

◄ Heating




Cooling ►

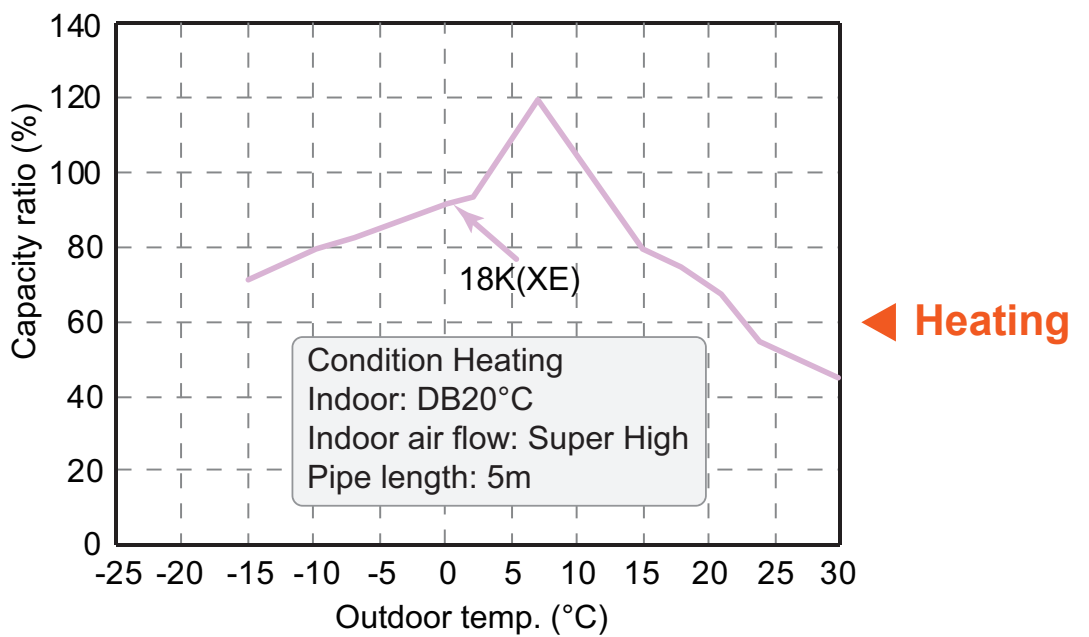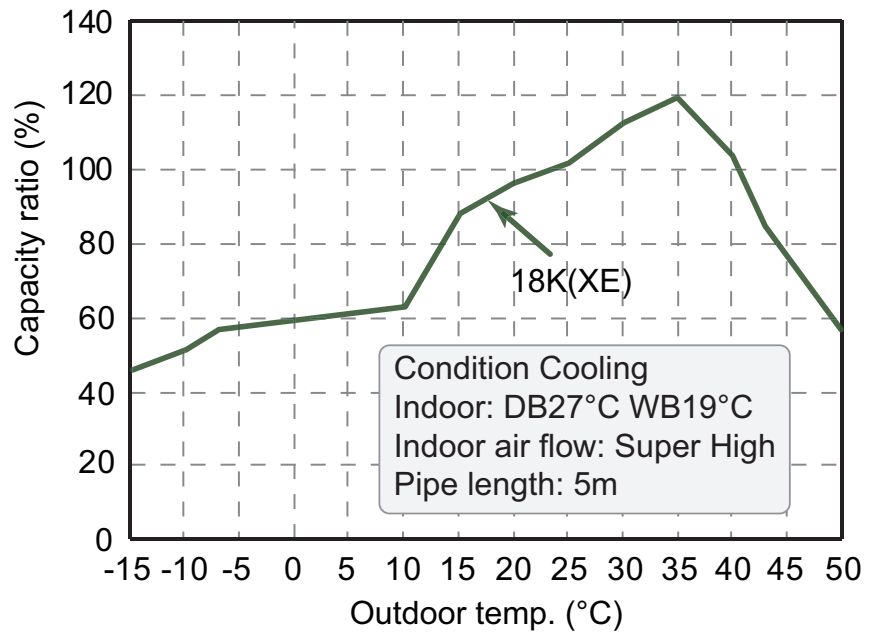

◀ Heating

4. Outline Dimension Diagram


4.1 Indoor Unit

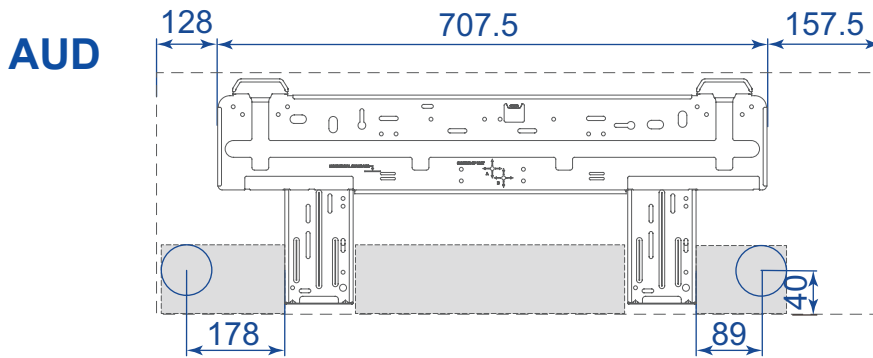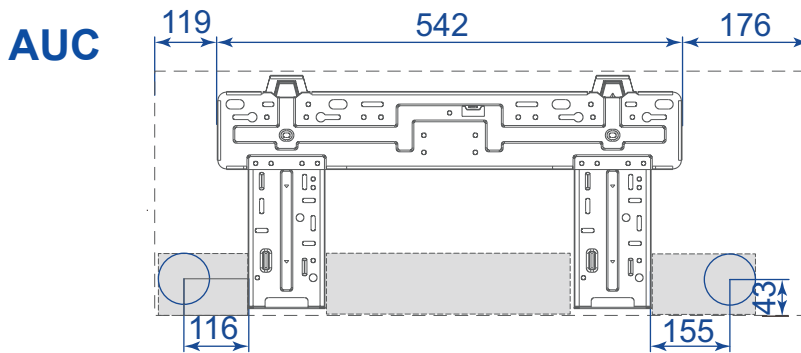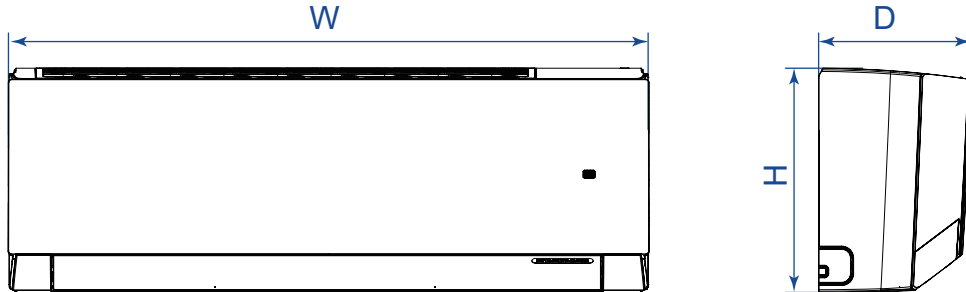

Unit: mm

Indoor Unit Model	W	H	D
AUC	837	293	200
AUD	993	311	222

4.2 Outdoor Unit

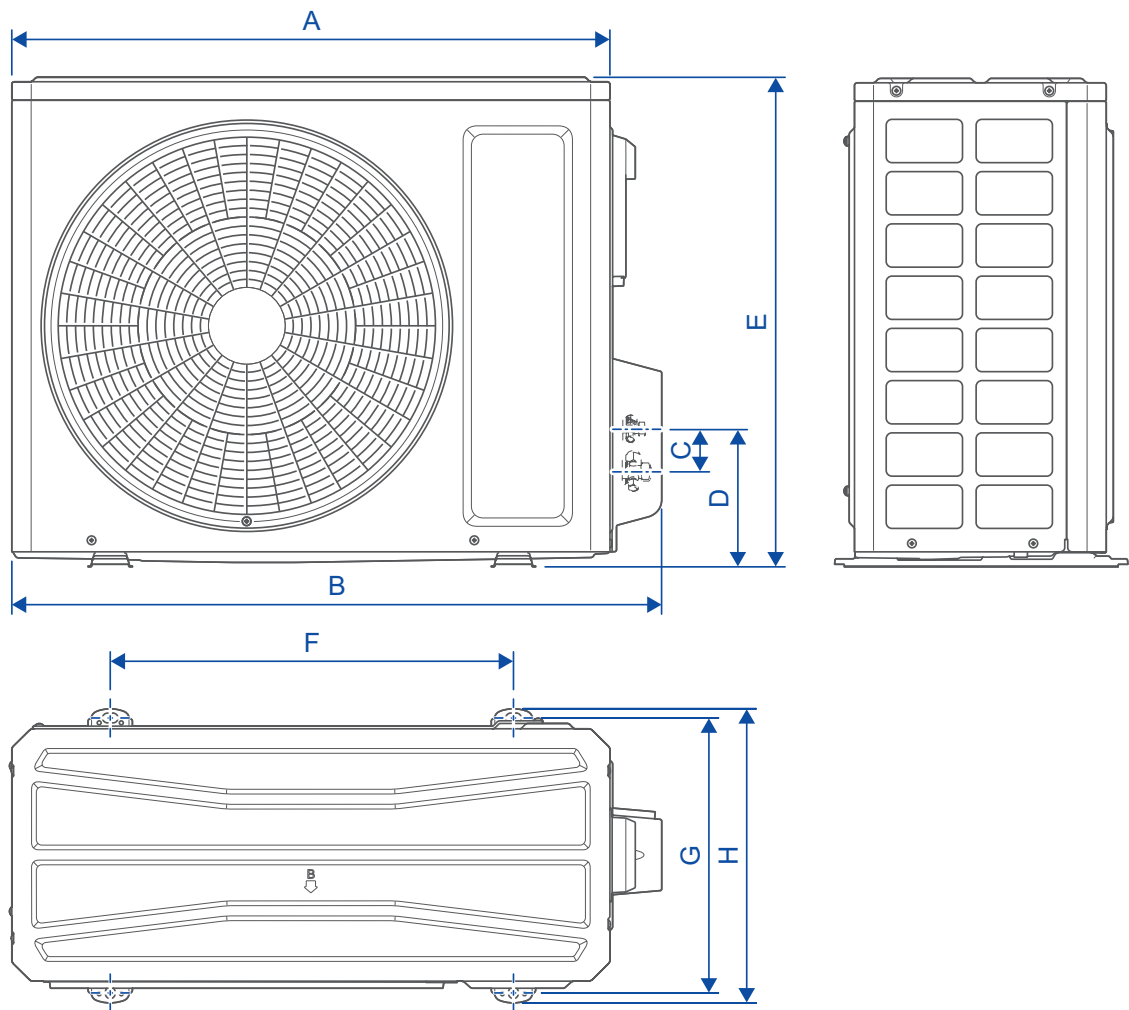

NOTE: The appearance of outdoor unit is for reference only.

Unit: mm

Outdoor Unit Model	A	B	C	D	E	F	G	H
XB	675	732	65	163	555	455	310	330
XD	745	802	65	163	555	513	331	350
XE	805	873	65	164	555	528	349	376
XF	889	958	65	165.6	660	570	371	402